

A704515R0v06

DX-690-960-65-15i-M-R

EasyRET Low-Band 2-Port Antenna with 1 Integrated RCU - 1.4m



HUAWEI


Antenna Specifications

Electrical Properties	
Frequency range (MHz)	690 - 960
Electrical downtilt (°)	0 - 14
Gain (dBi)	15
Horizontal 3dB beam width (°)	65
Vertical 3dB beam width (°)	14.8
VSWR	< 1.5
Intermodulation IM3 (dBc)	≤ -153 (2 x 43 dBm carrier)
Impedance (Ω)	50

Mechanical Properties	
Antenna dimensions (H x W x D) (mm)	1415 x 298 x 150
Antenna weight (kg)	12.3
Clamps weight (kg)	2.9 (2 units)
Wind load (N)	Frontal: 550 (at 150 km/h) Lateral: 235 (at 150 km/h) Rear side: 660 (at 150 km/h)
Connector	2 x 4.3-10 Female

Accessories

Item	Model	Description	Weight	Units per antenna
Downtilt kit	ASMDT0B01	Mechanical downtilt: 0 - 16 °	1.3 kg	1 (Separate packing)

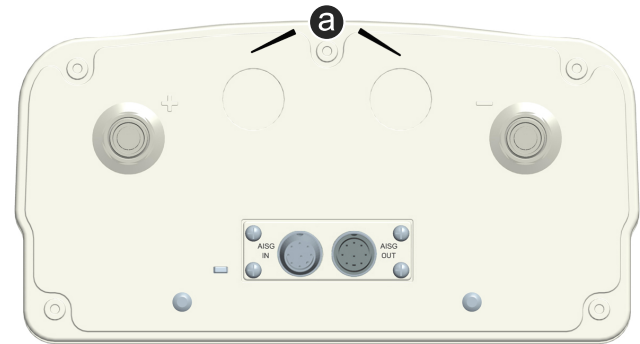

Integrated RET S/N:

a HWMxxx.....r
r - Red

